

AP433 DUAL-BAND HAZARDOUS AREA ACCESS POINT ENCLOSURE FOR CISCO C9130AXE

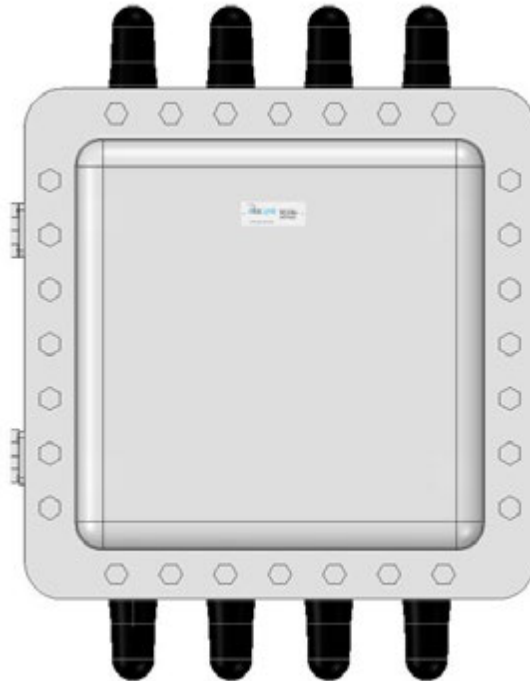

The AP433 is designed to house the Cisco C9130AXE dual band access point for use in the hazardous areas. The enclosure, all hardware, and antennas are rated for Class I, Div 1, groups C & D Hazardous Locations. All hardware, DART cable, and mounting plate are included to make installation of the access point quick and easy. Also included are eight of our proprietary explosion proof CTX series dual band (2.4GHz/5GHz) antennas. The access point is not included.

Ratings:

Class I, Div 1 Groups, C & D

Applications:

- Pharmaceuticals
- Oil refineries
- Oil & Gas Platforms
- Chemical Plants

Ordering information:

AP433
AP433-N4 (NEMA 4X)
AP433-ATEX (ATEX Zone 1)



4

3



2

1


CAST ALUMINUM ENCLOSURE

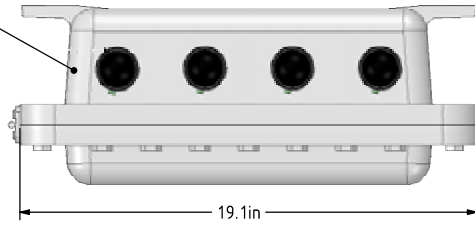

HAZARDOUS AREA ANTENNAS, DUAL BAND 2.4GHz/5GHz QTY 8

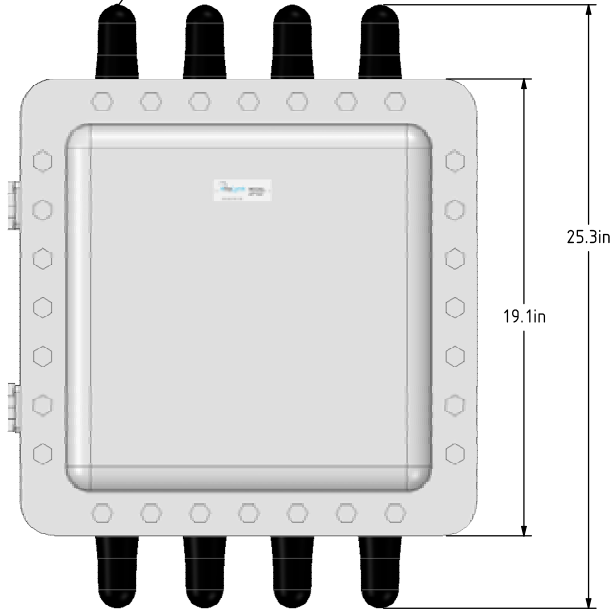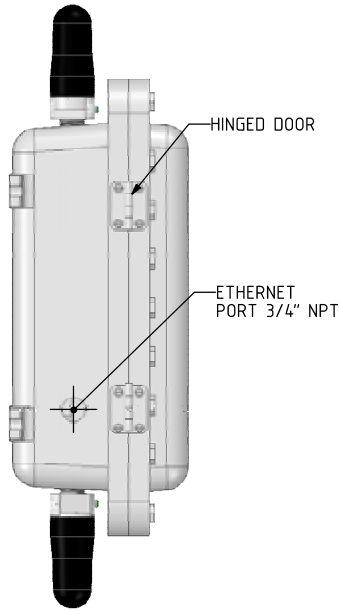

MOUNTING DIMENSIONS

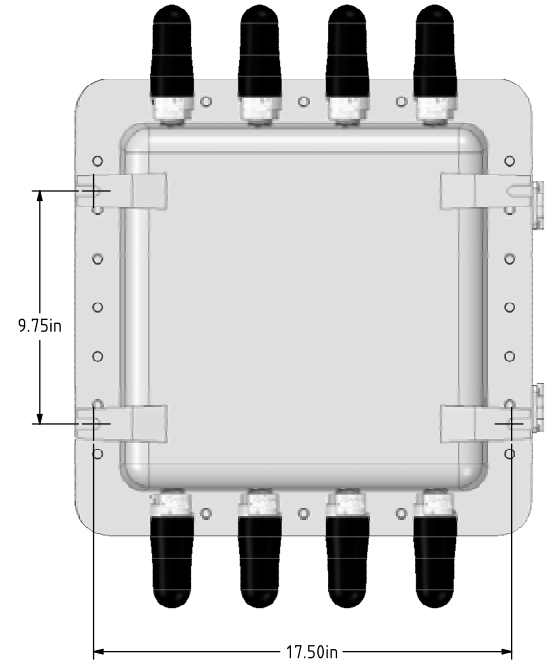

MOUNT WITH 1/2 LUG BOLTS QTY 4

NOTES:

1. HAZARDOUS AREA ENCLOSURE FOR CISCO C9130AXE.
2. ANTENNAS AND ENCLOSURE ARE RATED FOR CLASS I, DIVISION 1, GROUPS C & D.
3. ATEX ZONE 1 RATING AND NEMA 4X RATING AVAILABLE.
4. ANTENNA GAIN 2.4 GHz: 2dBi, 5 GHz: 3 dBi.
5. INTERNAL DART CABLE INCLUDED.
6. APPROXIMATE WEIGHT: 110 lbs.

| | | | |
|---|-----------------|--------------------|-------|
| 790 CROSS POINTE ROAD, COLUMBUS, OHIO 43230, U.S.A. | | | |
| DESCRIPTION AP433 EXPLOSION PROOF ENCLOSURE ASSEMBLY FOR CISCO C9130AXE | | | |
| SIZE C | CAGE CODE | DWG NO. SD-C-0418A | REV A |
| SCALE 1:4 | www.analynk.com | SHEET | |

4

3

2

1

D

C

B

A

D

C

B

A